



## HTD 14M 皮帶規格(齒距：14.0mm)

### 皮帶齒型尺寸





### 齒輪齒型尺寸

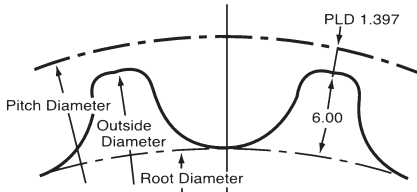

皮帶表示方法：1778 14M 35  
 長度mm 規格 寬mm

## HTD 20M 皮帶規格(齒距：20mm)

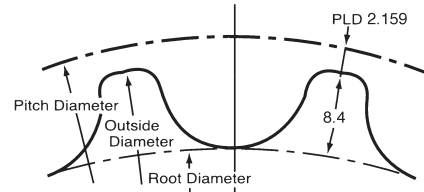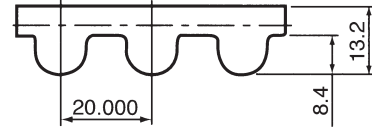

皮帶表示方法：5200 20M 115  
 長度mm 皮帶規格 寬mm

### HTD 14M 皮帶長度

| 規格        | 長度(mm) | 齒數  |
|-----------|--------|-----|
| *784-14M  | 784    | 56  |
| *826-14M  | 826    | 59  |
| *924-14M  | 924    | 66  |
| 966-14M   | 966    | 69  |
| *1092-14M | 1092   | 78  |
| 1148-14M  | 1148   | 82  |
| 1190-14M  | 1190   | 85  |
| 1344-14M  | 1344   | 96  |
| 1400-14M  | 1400   | 100 |
| 1456-14M  | 1456   | 104 |
| 1512-14M  | 1512   | 108 |
| 1540-14M  | 1540   | 110 |
| 1568-14M  | 1568   | 112 |
| 1610-14M  | 1610   | 115 |
| 1638-14M  | 1638   | 117 |
| 1652-14M  | 1652   | 118 |
| 1680-14M  | 1680   | 120 |
| 1736-14M  | 1736   | 124 |
| 1778-14M  | 1778   | 127 |
| 1890-14M  | 1890   | 135 |
| 1932-14M  | 1932   | 138 |
| 1946-14M  | 1946   | 139 |
| 2002-14M  | 2002   | 143 |
| 2100-14M  | 2100   | 150 |
| 2198-14M  | 2198   | 157 |
| 2310-14M  | 2310   | 165 |
| 2450-14M  | 2450   | 175 |
| 2590-14M  | 2590   | 185 |
| 2660-14M  | 2660   | 190 |
| 2800-14M  | 2800   | 200 |
| 2940-14M  | 2940   | 210 |
| 3150-14M  | 3150   | 225 |
| 3360-14M  | 3360   | 240 |
| 3500-14M  | 3500   | 250 |
| 3850-14M  | 3850   | 275 |
| 4004-14M  | 4004   | 286 |
| 4326-14M  | 4326   | 309 |
| *4578-14M | 4578   | 327 |
| *4956-14M | 4956   | 354 |
| 5320-14M  | 5320   | 380 |
| *5740-14M | 5740   | 410 |
| *6160-14M | 6160   | 440 |
| *6860-14M | 6860   | 490 |

### HTD 14M標準皮帶寬

| 皮帶寬(mm) | 30.0 | 40.0 | 55.0 | 70.0 | 85.0 | 100.0 | 115.0 | 130.0 | 150.0 | 170.0 |
|---------|------|------|------|------|------|-------|-------|-------|-------|-------|
| 皮帶寬代號   | 30   | 40   | 55   | 70   | 85   | 100   | 115   | 130   | 150   | 170   |

### HTD 20M 皮帶長度

| 規格        | 長度(mm) | 齒數  |
|-----------|--------|-----|
| *2000-20M | 2000   | 100 |
| *2500-20M | 2500   | 125 |
| *3400-20M | 3400   | 170 |
| *3800-20M | 3800   | 190 |
| *4200-20M | 4200   | 210 |
| *4600-20M | 4600   | 230 |
| *5000-20M | 5000   | 250 |
| *5200-20M | 5200   | 260 |
| *5400-20M | 5400   | 270 |
| *5600-20M | 5600   | 280 |
| *5800-20M | 5800   | 290 |
| *6000-20M | 6000   | 300 |
| *6200-20M | 6200   | 310 |
| *6400-20M | 6400   | 320 |
| *6600-20M | 6600   | 330 |

Available widths of 115mm,170mm,230mm, 290mm and 340mm.

$$\text{齒輪節圓直徑 (PD)} = \frac{P \times N}{\pi}$$

$$\text{齒輪外徑 (OD)} = PD - 2 \times PLD$$

P：皮帶齒距(mm)  $\pi = 3.14159$

N：皮帶齒輪齒數 14M · PLD：1.397mm